

POWER IN AN EXTRA LARGE SIZE








The scrubbing machine that changes the user experience from the very first glance

The shape of the machine inspires a sense of safety and control, thanks to the harmonious and balanced design that promises a user experience that is out of the ordinary.

MxL has the power you need to work in any environment and under the most difficult conditions, as a result of its careful design, which combines high-performance components with the most advanced technology.

As soon as you turn it on, you can feel the value of a machine created to enhance the professional results of every cleaning operation, with innovative features that provide operators with all the tools necessary to successfully complete their work.

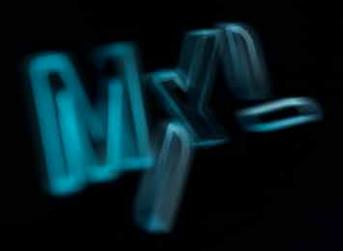







Its robust design is not afraid of any environment

The wrap-around lines delineate an enveloping structure made from polyethylene, which protects the heart of the machine and enhances its robust appearance

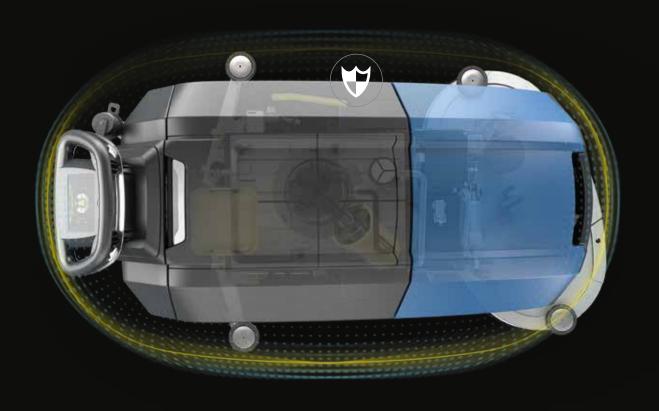

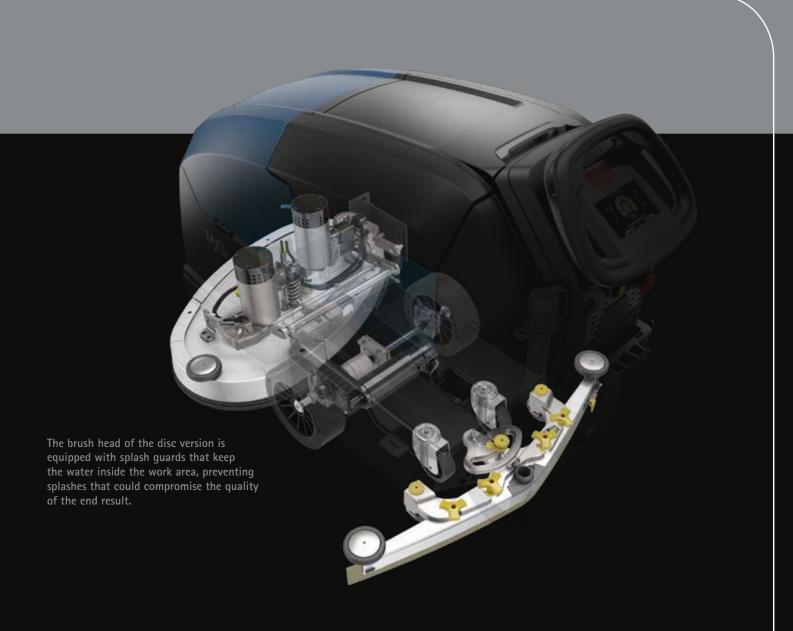


The brush head and the squeegee are made from aluminum, a material chosen for its durability and reliability over time as well as for its lightness, to provide you with better manoeuvrability and comfort



MxL gives more value to your time: it reduces downtimes and increases productivity






The operator can work in absolute tranquility in the knowledge that when he needs them, all the accessories are close at hand, and once finished with, these can easily be placed back in their compartment, allowing the cleaning operation to proceed without long interruptions and wasted time.






QUIET OPERATIONS

With the Eco Mode and FNC technologies that lower the noise level, MxL safequards the health of the operator and that of the people in the environment where it is used









Automatic system for filling the fresh water tank, lets the operator perform other activities while the tank quickly fills up



NO TRAINING

No doubt will keep you from your work. The integrated video tutorials on the display demonstrate how to perform routine and extraordinary maintenance, to prevent uncertainty and wasted time





The spray gun has a dual role. During machine maintenance, it facilitates the rinsing of the tanks at the end of the shift, but it can also be used during the work, to moisten stubborn dirt stains and make them easier to remove



Powerful and versatile, it is always ready to meet your goals



POWER MODE

When performing localized heavy duty cleaning, pressing the Power mode function activates a work mode that uses all the scrubbing parameters to the maximum, for a short period of time. This enables the machine to act with greater force on a specific area just for the time needed, without wasting resources and having to resort to passing over the area more than once.



Consistent cleaning results

Pressure on the brushes is kept constant, delivering consistent high cleaning results on any type of flooring



FLR-FIMAP LONG RANGE

Increases productivity by up to 70%

Great autonomyWork for up to 5 hours non-stop



No risk of slipping

The powerful 3-stage vacuum motor leaves the floor immediately dry and safe



VACUUM WAND

Vacuum wand allows to clean areas that are out of reach of the machine and successfully fulfill the task





Equipped to give you safety and protection

The equipment on the MxL prevents accidents, increases safety while working and supports the operator at all times, so that everything is always under control, without ever encountering difficulties.

ACTIVE TECHNOLOGIES to prevent accidents



Automatically operated when the machine stops It works as a safety parking brake



LED HEADLIGHTS

Maximize work safety in

all conditions

ELECTROBRAKE



PASSIVE SYSTEMS to help the operator in case of emergency



Reduces time to service in case of emergency. The red button sends an SMS alert to receive prompt help, reducing downtimes

SOS DEVICE



By pressing a single button the machine stops immediately

EMERGENCY STOP









LOG-IN WITH PASSWORD



ONE PROGRAMS



CRUISE CONTROL



SUSTAINABLE CLEANING



SEVERE CLEANING



VIDEO TUTORIALS

You will feel like you have always known how to use it

The color interface is so user-friendly that it needs no explanation, just a glance is all it takes to have everything under control.

Through the touch screen, you can explore all the solutions of the iD – intelligent Drive system, which will make every operation unique.



LOG-IN WITH PASSWORD To protect your investment



ZONE PROGRAMS
For all the performance you'll ever need



ECO MODE

To protect the environment



POWER MODE
For maximum power when you need it




VIDEO TUTORIALS
For a more efficient, fast and easy operator training



EXPERIENCE CONNECTIVITY

Discover the FFM universe and experience the advantages of being constantly connected, with My.Machine app!

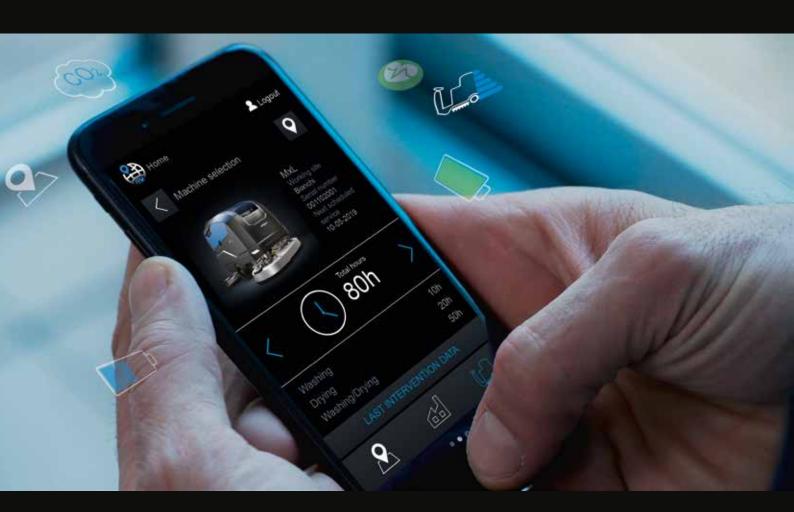





Keep tabs on your machines remotely when you want and from wherever you want!

Developing new technology to improve efficiency is one of the core missions of Fimap.

An example of this is FFM, the Fimap Fleet Management system which collects the data sent by the machines and transforms it into valuable information accessible to you easily in real time, 24/7, from your smartphone, through the app My.Machine.

Being constantly connected to your machines will help you operate them even more efficiently and effectively. My.Machine lets you know where the machines are, if the operation is being carried out according to plans and at the scheduled time.

The machine's health status is constantly monitored. In the very unlikely event of a breakdown, you'll receive an alert notification directly on your smartphone, allowing you to take action promptly and immediately call the technical support.

You can check the battery conditions and the quality of the charges in order to optimize battery endurance and life cycle.



GEOLOCALISATION



USAGE INFORMATION



HEALTH STATUS



ENVIRONMENTAL IMPACT

You know where your machines are

You know how your machines are used

You know the health status of machines and batteries

You can check the machine consumption per intervention



Protect the environment with efficient management of resources

With better management of resources, you can clean more sq.m with the same levels of consumption, avoiding waste. Fimap technologies optimize the use of water, detergent and energy to protect the environment and reduce the cost of cleaning per sq.m.



The Eco Mode function helps prevent water, detergent and energy consumption by using only the quantities you need and nothing more







FLR-FIMAP LONG RANGE

Reduces water and detergent consumption per cleaning operation by up to 66%*

This is a system which recycles detergent solution to increase autonomy:

to scrub more sq.m. while using less resources



FSS-FIMAP SOLUTION SAVER

Water and detergent quantities are separately dosed, reducing consumption by up to 50%



FWF-FIMAP WATER FLOW

Ensures uniform cleaning results across the entire working width on the first pass, optimizing detergent solution consumption

ENERGY



FES-FIMAP ENERGY SAVER

Reduces energy consumption by up to 35%

LED TECHNOLOGY

Up to 80% lower energy consumption than conventional headlights.
The LED headlights consume much less energy than conventional headlights, offer a longer lifespan and illuminate with a brilliant white light similar to natural daylight



NOISE LEVELS



FNC-FIMAP NOISE CANCELLING Reduces sound pressure

*Saving calculated on a triple recycling cycle



Make it perfect for you: configure it with the characteristics that are ideal for your needs

Choose your machine







With flexible equipment options, you can configure it in the most convenient and beneficial way for you

Choose the instrument panel



Basic



Membrane control panel





Touch screen display

OPTIONALS AND ACCESSORIES

OPTIONALS







Vacuum wand

Spray gun

FFF - FIMAP FAST FILL

FFM-FIMAP FLEET MANAGEMENT









Front driving LED headlights

FSS-FIMAP SOLUTION SAVER


Battery charger on board

Squeegee holder accessory



FLR-FIMAP LONG RANGE

ACCESSORIES





A wide choice of disc or cylindrical brushes in PPL is offered, available in thicknesses from 0.3 to 0.9 cm. These offer the perfect solution for dealing with any type of dirt on any floor

Abrasive brushes: Ideal for heavy duty cleaning on industrial surfaces



Rear squeegee rubber blades 33 SHORE (PARA) For maintenance cleaning of smooth floors 40 SHORE (PARA) FOLYURETHANE For heavy duty cleaning on industrial floors, even with wide gaps



OPTIONAL AND STANDARD EQUIPMENT


| | DUAL DISC | | | | | | | | | | CYLINDRICAL | | | |
|--|-----------|-----------|------------|---------------|-----------|------------|-------|-----------|------------|--------|-------------|----------------|--|--|
| USER EXPERIENCE | 65 Bt | 65 Bt Pro | 65 Bt Plus | 75 Bt | 75 Bt Pro | 75 Bt Plus | 85 Bt | 85 Bt Pro | 85 Bt Plus | 70 Bts | 70 Bts Pro | 70 Bts Plus | | |
| iD-Intelligent Drive: | - | - | • | - | - | • | - | - | • | - | - | • | | |
| - 5 inch high resolution colour touch screen | - | - | • | - | - | • | - | - | • | - | - | • | | |
| - Log-in with password | - | - | • | - | - | • | - | - | • | - | - | • | | |
| - Zone programs | - | • | • | - | • | • | - | • | • | - | • | • | | |
| - Cruise control | - | • | • | - | • | • | - | • | • | - | • | • | | |
| - Eco Mode | • | • | • | • | • | • | • | • | • | • | • | • | | |
| - Power Mode | - | - | • | - | - | • | - | - | • | - | - | • | | |
| - Video tutorials | - | - | • | - | - | • | - | - | • | - | - | • | | |
| Membrane control panel | - | • | - | - | • | - | - | • | - | - | • | - | | |
| COMFORT | | | | | | | | | | | | | | |
| Hour meter | • | • | • | • | • | • | • | • | • | • | • | • | | |
| Cleaning solution level indicator | • | • | • | • | • | • | • | • | • | • | • | • | | |
| Fresh water empty tank light | - | - | • | - | - | • | - | - | • | - | - | • | | |
| Battery charger | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Brush and squeegee actuator | - | - | • | - | - | • | - | - | • | - | - | • | | |
| Brush head actuator | - | • | - | - | • | - | - | • | - | - | • | - | | |
| Brush head manual lifting | • | - | - | • | - | - | • | - | - | • | - | - | | |
| Squeegee manual lifting | • | • | - | • | • | - | • | • | - | • | • | - | | |
| Vacuum wand with 3-stage motor* | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 | | |
| Spray gun* | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 | | |
| Squeegee holder accessory | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| FFF (Fimap Fast Fill) | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 | - | 0 | 0 | | |
| Noiseless suction | - | • | - | - | • | - | - | • | - | - | • | - | | |
| PRODUCTIVITY | | | | | | | | | | | | | | |
| Water flow selector | _ | • | • | - | • | • | _ | • | • | _ | • | • | | |
| Triple pressure selector | _ | _ | • | _ | - | • | - | _ | • | _ | - | • | | |
| Double pressure | - | • | - | _ | • | - | - | • | - | _ | • | - | | |
| FFM (Fimap Fleet Management) with SOS device | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Squeegee and squeegee support in aluminum | • | • | • | • | • | • | • | • | • | • | • | • | | |
| Vacuum speed selector | - | - | • | - | - | • | - | - | • | - | - | • | | |
| SAFETY | | | | | | | | | | | | | | |
| Driving LED headlights (front) | 0 | 0 | • | 0 | 0 | • | 0 | 0 | • | 0 | 0 | • | | |
| Emergency Stop | • | • | • | • | • | • | • | • | • | • | • | • | | |
| Electro parking brake | • | • | • | • | • | • | • | • | • | • | • | • | | |
| ENVIRONMENT | | | | | | | | | | | | | | |
| FSS (Fimap Solution Saver)** | _ | 0 | 0 | _ | 0 | 0 | _ | 0 | 0 | _ | 0 | 0 | | |
| FLR (Fimap Long Range)** | - | 0 | 0 | | 0 | 0 | | 0 | 0 | - | 0 | 0 | | |
| FNC (Fimap Noise Canceling) | • | - | - | <u>-</u> • | - | - | • | - | - | • | - | - | | |
| FES (Fimap Energy Saver) | • | - | • | • | • | - | • | • | • | • | - | - | | |
| FWF (Fimap Water Flow) | • | • | • | • | • | • | • | | • | _ | _ | _ | | |
| Tivi (Timap vacci Tiov) | | | | | | | | | | | | | | |


^{*} In PRO versions the two devices cannot be installed together


| STANDARD | o UPON REQUEST | - NOT AVAILABLE |
|----------|----------------|-----------------|

^{**} The two devices cannot be installed together

DIMENSIONS AND TECHNICAL DATA







65 Bt: 785 mm 75 Bt/70 Bts: 885 mm 85 Bt: 985 mm

75 Bt: 1514 mm 85 Bt: 1542 mm 70 Bts: 1471 mm

| TECHNICAL DATA – MxL | | DUAL DISC 65 Bt 65 Bt Pro 65 Bt Plus 75 Bt 75 Bt Pro 75 Bt Plus 85 Bt Pro 85 Bt Pro 85 Bt Pro 85 Bt Pro | | | | | | CYLINDRICAL | | | | | | | |
|--|-------------------|---|-----------|------------|------------|-------------|------------|-------------|-------------|------------|------------|------------|-------------|--|--|
| TECHNICAL DATA - IVIXL | | | 65 Bt Pro | 65 Bt Plus | 75 Bt | 75 Bt Pro | 75 Bt Plus | 85 Bt | 85 Bt Pro | 85 Bt Plus | 70 Bts | 70 Bts Pro | 70 Bts Plus | | |
| Productivity theoretical | up to sqm/h | 2620 | | | 3000 | | | 3400 | | | 2580 | | | | |
| Estimated coverage | up to sqm/h | 1638 | | | 1913 | | | 2100 | | | 1613 | | | | |
| SCRUBBING SYSTEM | | _ | | | | | | | | | _ | | | | |
| Working width | mm | | 655 | | | 765 | | | 840 | | | 645 | | | |
| Brushes motors | (no.) V/W | | | | (2) 24/500 | | | | | | (2) 24/450 | | | | |
| Brushes rpm | rpm/min | | | | 140 | | | | | | 550 | | | | |
| Pressure on the brushes (min med max) | kg | 33 | 33÷55 | 33÷45÷55 | 35 | 35÷57 | 35÷45÷57 | 38 | 38÷60 | 38÷45÷60 | 33 | 15÷40 | 15÷30÷40 | | |
| TANKS AND RECOVERY SYSTEM | | | Π | | | | | | | | | | | | |
| Solution tank | I | 74 | | | | | | | | | | | | | |
| Recovery tank | 1 | 85 | | | | | | | | | | | | | |
| Suction motor | V/W | | | | | | 24/- | | | | | | | | |
| Vacuum water lift | mbar | | | | | , | 11 | 12 | | | | | | | |
| 3-stage vacuum motor (for vacuum wand) | V/W | - | | /680 | - | 24/680 | | - | 24/680 | | - | 24/680 | | | |
| Vacuum water lift (3-stage motor) | mbar | - 166 | | - | 166 | | - | - 166 | | - | | 166 | | | |
| Detergent tank capacity (FSS) | I | | 3 | | | | | | | | | | | | |
| Maximum volume of the debris hopper | I | | | | - | | | | | | 8 | | | | |
| BATTERIES | | _ | | | | | | | | | | | | | |
| Supply/traction | V | | | | | | 24/ | aut. | | | | | | | |
| Batteries | (no.) V/Ah C5 | | | | | | (4) 6/1 | | | | | | | | |
| | (110.) V// (11 C5 | | | | (4) 6/21 | | | | | | | | | | |
| Battery run time* | up to h | 5 4,4 | | 5 | 5 4,4 | | 5 4,4 | | 4,5 | | | | | | |
| PROPELLING SYSTEM | | | | | | | | | | | | | | | |
| Forward working speed | km/h | | | | | | | | 4 | | | | | | |
| Transport speed | km/h | 4,9 | | | | | | | | | | | | | |
| Traction motor | V/W | | | | | | (1) 24 | 1/300 | | | | | | | |
| SPECIFICATIONS | | | | | | | | | | | | | | | |
| | | | 1491 | | 1514 | | 1542 | | | 1471 | | | | | |
| Machine dimensions (I x h x a) | mm | 1093 701 | | 1093 | | 1093 878 | | | 1093 733 | | | | | | |
| | | | | 795 | | | | | | | | | | | |
| Squeegee width | mm | 785 | | 885 | | 985 | | | 885 | | | | | | |
| Machine weight empty without batteries | kg | 186 | 191 | | 188 | | | 191 | | 96 | 187 | | 192 | | |
| Machine weight empty with batteries | kg | 310 | 3 | 315 | 312 | 3 | 317 | 315 | 3 | 20 | 311 | | 316 | | |
| GVW (Gross Vehicle Weight) | kg | 387 | 387 400 | | 389 402 | | 392 405 | | 388 410 | | 410 | | | | |
| Sound level (ISO 11201) | dB (A) | | | | | | < | 70 | | | | | | | |

^{*} Run times are based on continuous scrubbing run times



Your best investment in cleaning

The service package that gives you more of what you need for less than you think! We want you to deal only with your work, leave everything else to Fimap Life!

FIMAP INTELLIGENCE



FIMAP FINANCE



FIMAP MAINTENANCE



(2) FIMAP FLEET MANAGEMENT



FIMAP NETWORK



FIMAP ACADEMY



CERTIFICATIONS











For any additional information or for a demo please contact your usual Fimap dealer



FIMAP spa - Via Invalidi del Lavoro, 1 - 37059 S. Maria di Zevio - Verona - Italy Tel. +39 045 6060411 - Fax +39 045 6060417 - E-mail: fimap@fimap.com













Scan the QR Code with your Smart Phone and visit our web-site